


GD-900 Series Door Holder

GD-900F (Floor Mount)



Input Voltage: 12Vdc/ac (24V available by special order)
Current Draw: 125mA@12Vdc
60mA@24Vdc
Cutout Switch
Holding Force: 100 lbs
Finish: Black Powder Coated

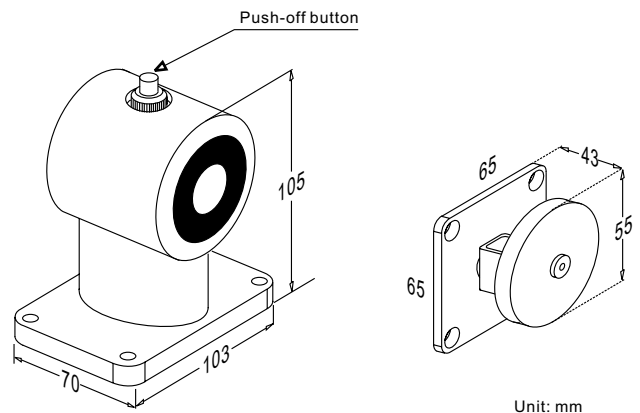

GD-900W

Wall Flush Mount (ANSI Size)

Input Voltage: 12Vdc/ac (24V available by special order)
Current Draw: 125mA@12Vdc
60mA@24Vdc


Holding Force: 100 lbs

Housing: Stainless


Optional: Stainless box for surface mount.



With SMB-050 housing
(Optional) for surface mount installation.



Application :

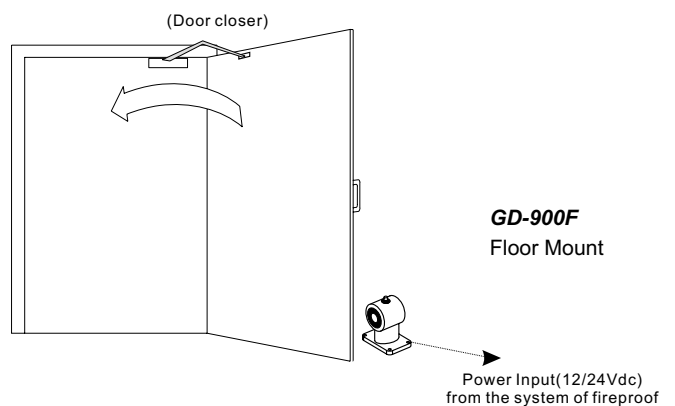

GD-900F
Floor Mount

Specifications:


The GD-900 series door holder is a fail-safe unit energized by a power supply installed on large-scale building, between fire escape doors. It releases the armature plate allowing the door closer to close the door when the fire prevention system detects a fire alarm or emergency. The floor mount are constructed with a PUSH OFF button on magnet for instant release, the door can be opened or closed manually at any time. Also available in wall flush mount installation and optional stainless steel box for surface mount model.

Warranty:

GEM access control related accessories are warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original customer.

Disclaimer:

The information and specifications printed in this manual are current at the time of publication. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

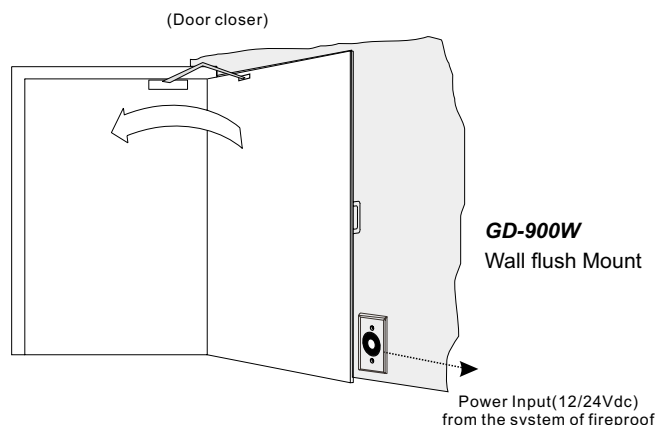

GD-900W
Wall flush Mount

