

RC-180-12/RC-B180-12/184/8080-T Series



- ◆ Recessed magnetic contact
- ◆ 12" #22AWG leads or screw terminals
- ◆ Longer leads, zip cord or jacketed cable upon request
- ◆ Built in E.O.L. Resistors and Diodes upon request
- ◆ Supervisory Loops upon request
- ◆ Colors white, brown, gray, black
- ◆  Indicates U.L. 10C Fire Rated



RC-180-12 / RC-B180-12 (Biased)



184-12 CE



8484-T



8080-T

Part Numbers

		Closed Loop	Open Loop	SPDT	DPDT
Standard Gap up to 1/2" on steel*	3/4" Dia.	RC-180-12	185-12	190-12	195-12
	1" Dia.	CE {184-12}	189-12	194-12	CE {199-12}
	3/4" Dia.	8080-T	8585-T		
	1" Dia.	8484-T	8989-T		
Wide Gap 3/4"+ on steel*	3/4" Dia.	180-12WG	185-12WG	190-12WG	195-12WG
	1" Dia.	184-12WG	189-12WG	194-12WG	199-12WG
	3/4" Dia.	8080-TWG	8585-TWG		
	1" Dia.	8484-TWG	8989-TWG		

7/8" Diameter also available. P/N 81-12 & 81-12WG, white or black only. Call the factory for more information.

INSTALLATION APPLICATIONS

The RC-180-12 is the industry standard 3/4" diameter recessed steel door switch set with 12" leads. The innovative 8080-T series is a 3/4" diameter recessed switch set designed for residential, commercial and industrial doors and frames. The shorter length terminals makes the installation of the set quick and simple.

ASCENDO PTE LTD

85 Playfair Road

#06-02, Tong Yuan Industrial Building


Singapore 368000

Tel: 6741 1218

sales@ascendo.com.sg

www.ascendo.com.sg

3/4" & 1" Steel Door Recessed Switch Set

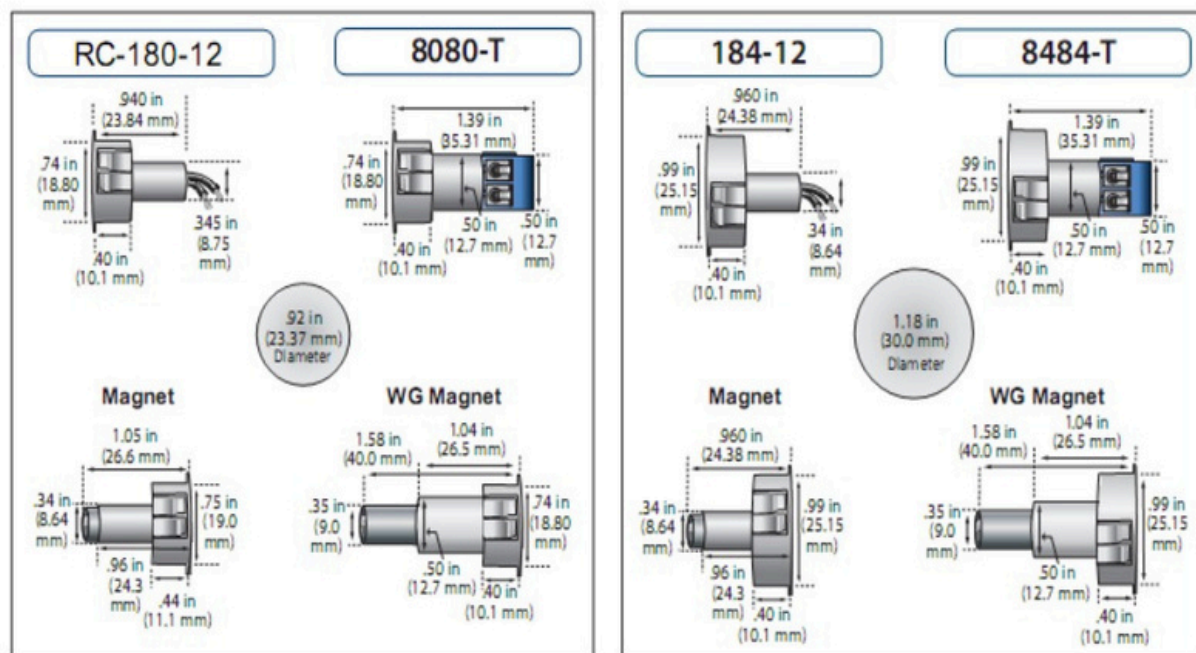

PRODUCTS MEET OR EXCEED THESE MINIMUM GENERAL SPECIFICATIONS:

Part Number	Loop Type	Electrical Configuration	Reed Form	Maximum Initial Contact Resistance (Ω)	Max. Contact Rating (W)	Max. Switching Voltage (VDC)	Max. Switching Current (A)
180-12	Closed	N/O	A	.150	10	200	.400
180-12WG	Closed	N/O	A	.150	10	200	.400

ASCENDO PTE LTD

85 Playfair Road
 #06-02, Tong Yuan Industrial Building
 Singapore 368000

Tel: 6741 1218
sales@ascendo.com.sg
www.ascendo.com.sg